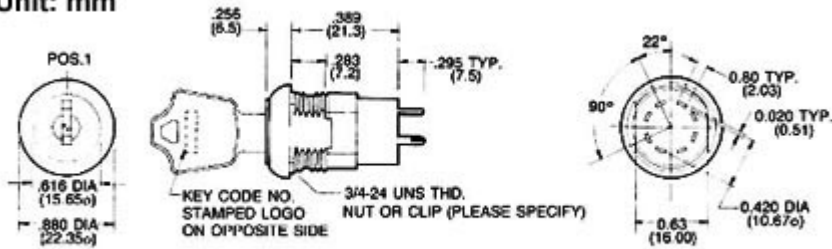

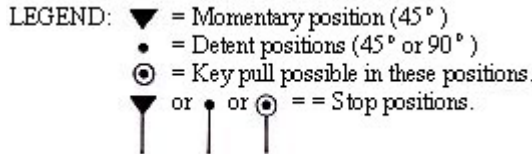




Unit: mm



TERMINAL (BOTTOM VIEW)



DESCRIPTIONS:




















- Zinc alloy die cast housing and cylinder.
- Bright nickel plated standard.
- 4 disc tumbler mechanism.
- Brass keys, nickel plated.
- Various key withdrawals available.
- Golden plated contacts and terminals.
- Hex nut or speed clip mounted.
- 25 combinations available.

SPECIFICATION:

- Contact Rating: 4A 125VAC, 2A 250VAC.
- Contact Resistance: 10Milli-Ohms Max.
- Insulation Resistance: 500 Meg-Ohms Min. (500VDC)
- Dielectric Strength: 1500 VAC -1 Minute.

MODELS/SWITCHING AND LOCK FUNCTION

LOCK CONFIGURATION (AS VIEWED FROM KEY END)	MODEL/NO. NO./POLES	CONNECTED TERMINALS					KEY PULL POSSIBLE THESE POS
		POS.1	POS.2	POS.3	POS.4	POS.5	
	S216-A SP S216-B DP	8-1 8-1,4- 5	1-2 1-2,5- 6	2-3 2-3,6- 7			POS.1

 <p>POS.1 45 ° INDEXING</p>	S216-C SP S216-D DP	8-1 8-1,4-5	1-2 1-2,5-6	2-3 2-3,6-7			POS.3
 <p>POS.1 45 ° INDEXING</p>	S216-E SP S216-F DP	8-1 8-1,4-5	1-2 1-2,5-6	2-3 2-3,6-7			POS.1 POS.3
 <p>POS.1 45 ° INDEXING</p>	S216-G SP S216-H DP	8-1 8-1,4-5	1-2 1-2,5-6	7-8 7-8,3-4			POS.1
 <p>POS.1 45 ° INDEXING</p>	S216-I SP S216-J DP	8-1 8-1,4-5	1-2 1-2,5-6	7-8 7-8,3-4			POS.1 POS.2 POS.3
 <p>POS.1 45 ° INDEXING</p>	S216-K SP	8-1	1-2	2-3	7-8	6-7	POS.1
 <p>POS.1 45 ° INDEXING</p>	S216-L SP	8-1	1-2	2-3	7-8	6-7	POS.3 POS.5
 <p>POS.1 45 ° INDEXING</p>	S216-M SP	8-1	1-2	2-3	7-8	6-7	POS.1 POS.3 POS.5
 <p>POS.1 90 ° INDEXING</p>	S216-N SP S216-O DP	8-1 8-1,4-5	1-3 1-3,5-7				POS.1
 <p>POS.1 90 ° INDEXING</p>	S216-P SP S216-Q DP	8-1 8-1,4-5	1-3 1-3,5-7				POS.2
 <p>POS.1 90 ° INDEXING</p>	S216-R SP S216-S DP	8-1 8-1,4-5	1-3 1-3,5-7				POS.1 POS.2
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-T SP	8-1	1-3	7-8	6-7		POS.1
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-U SP	8-1	1-3	7-8	6-7		POS.2 POS.4
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-V SP	8-1	1-3	7-8	6-7		POS.1 POS.2 POS.4
 <p>POS.1 45 ° INDEXING MOMENTARY</p>	S216-W SP S216-X DP	8-1 8-1,4-5	1-2 1-2,5-6				POS.1
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-Y SP	7-1	1-2	2-3	6-7		POS.1
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-Z SP	7-1	1-2	2-3	6-7		POS.3 POS.4
 <p>POS.1 45 °/90 ° INDEXING</p>	S216-A1 SP	7-1	1-2	2-3	6-7		POS.1 POS.3 POS.4
 <p>POS.1 90 ° INDEXING</p>	S216-B1 SP	7-1	1-3	6-7			POS.1
 <p>POS.1 90 ° INDEXING</p>	S216-C1 SP	7-1	1-3	6-7			POS.2 POS.3

<p>POS.1 90° INDEXING POS.2 POS.3</p>	S216-D1 SP	7-1	1-3	6-7			POS.1 POS.2 POS.3
---	------------	-----	-----	-----	--	--	-------------------------